



HEAVY DUTY STROBE LAMPS
MULTI VOLTAGE LED STROBE BEACONS
www.chingmars.com.tw
LED LIGHT BARS

LED ROTATING BEACONS



CHINGMARS

INDEX

037 ... 037 ... Obstruction Lights & LED Module
034 ... 035 ... Motor Sirens & Megaphones
033 ... 033 ... Backup Alarms
032 ... 032 ... Sirens
031 ... 031 ... Magnetic Battery Operated LED Warning Lamps
028 ... 030 ... Rotating Beacons
027 ... 027 ... Magnetic Rotating Beacons
026 ... 026 ... AC Power Strobos
024 ... 025 ... Security Strobos
023 ... 023 ... LED Warning Light Strips
022 ... 022 ... LED Warning Beacons
021 ... 021 ... Directional LED Warning Lights
020 ... 020 ... LED Warning Light Bars
018 ... 019 ... Mini Led Warning Light Bars
016 ... 017 ... LED Warning Arrows & Light Sticks & Light Bars
015 ... 015 ... LED Warning Beacons & Rechargeable Beacons
013 ... 014 ... Heavy Duty Led Warning Beacons
012 ... 012 ... Heavy LED Warning Beacons
010 ... 011 ... Led Warning Beacons
008 ... 009 ... Multi Voltage LED Strobe Beacons
006 ... 007 ... Heavy Duty Strobe Lamps
002 ... 005 ... Multi Voltage Strobe Beacons



Corporation Profile

www.chingmars.com.tw

Ching Mars corporation established in 1985 by John Wang has developed to a leading manufacturer of safety equipment.

Ching Mars an ISO9001 company has grown to a full line of safety lighting equipment. Ching Mars equipment is found throughout the world. From incandescent rotating and flashing beacons, to gaseous discharge strobe lighting and LED emergency and warning lamps with multiple function capabilities.

Ching Mars is proud to offer certifications from recognized regulatory organizations such as SAE, UL, CE, and E-mark on many of their products.

With proven reliability, quality and a qualified staff dedicated to excellence in customer service. Ching Mars continues to offer support and assistance in meeting your needs. Open to new possibilities with the continuing transformations of warning lights in the industry, we are constantly expanding product lines of the best quality and meeting international safety standards. Ching Mars stands ready to supply your safety lighting requirements.

Our mission is to produce high quality products and provide the best service to our customers.



MULTI VOLTAGE STROBE BEACONS


UL APPROVED STROBE BEACONS



CAX45 STROBE LIGHT

Specifications



- Voltage: 12-120V DC
- Size: 128mm DIA x 90mm H
- Current/Energy: 0.28A/2Joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: Single
- Bulb: Xenon linear
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL, ECE R10



CAX110 STROBE LIGHT

Specifications


- Voltage: 12-120V DC
- Size: 139mm L x 57mm W x 67mm H
- Current/Energy: 0.25A/2Joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: Single
- Bulb: Xenon linear
- Colors: Amber, Blue, Red
- Enclosure Rating: IP65
- Certificate: CE, ECE R10



CTO15N STROBE LIGHT

Specifications


- Voltage: 12-120V DC
- Size: 97mm DIA x 130mm H
- Current/Energy: 0.25A/2Joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: Single
- Bulb: Xenon linear
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL, ECE R10

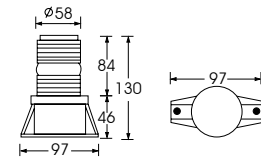

CAX48 STROBE LIGHT

Specifications


- Voltage: 12-120V DC
- Size: 148mm DIA x 120mm H
- Current/Energy: 0.38A/3Joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: single
- Bulb: Xenon Linear/Xenon U
- Colors: Amber, Blue, Clear, Red
- Enclosure Rating: IP66
- Certificate: CE, ECE R10

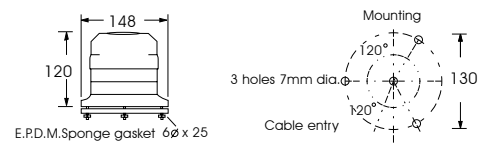

CTO15A STROBE LIGHT

Specifications


- Voltage: 120V AC
- Size: 72mm DIA x 165 mm H
- Current/Energy: 0.08A/2Joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: Xenon/Single
- Mounting: E27 Screw in
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL



CTO15F STROBE LIGHT

Specifications


- Voltage: 120V AC
- Size: 72mm DIA x 160 mm H
- Current/Energy: 0.08A/2Joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: Xenon/Single
- Mounting: 1/2" Thread w/Locknut female
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL

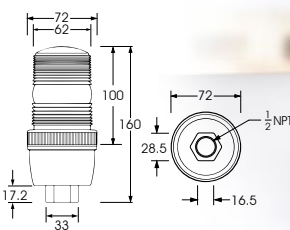

CTO15B STROBE LIGHT

Specifications


- Voltage: 12-80V DC
- Size: 72mm DIA x 162 mm H
- Current/Energy: 0.25A/2Joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: Xenon/Single
- Mounting: 1/2" Thread w/Locknut male
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL



CTO15C STROBE LIGHT

Specifications

- Voltage: 120V AC
- Size: 72mm DIA x 162 mm H
- Current/Energy: 0.08A/2Joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: Xenon/Single
- Mounting: 1/2" Thread w/Locknut male
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL



MULTI VOLTAGE STROBE BEACONS

Ching Mars' quality heavy duty strobe lamps come in a variety of sizes to suit your applications. Lamps are ruggedly constructed and available in a size and flash pattern to suit your requirements. Ching Mars strobe lamps are fully certified for legal highway use.



MULTI VOLTAGE STROBE BEACONS




CAX45-GUARD(OPTION)

CAX45NB STROBE LIGHT

Specifications


- Voltage: 12-120V DC
- Size: 128mm DIA x 90mm H
- Current/Energy: 0.28A/2joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: Single
- Bulb: Xenon linear
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL, ECE R10



CAX45NBM MAGNETIC STROBE LIGHT

Specifications

- Voltage: 12-80V DC
- Size: 128mm DIA x 90mm H
- Current/Energy: 0.29~0.04A/2joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: Single
- Bulb: Xenon
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL, ECE R10




MULTI VOLTAGE STROBE BEACONS



CAX46 STROBE LIGHT

Specifications


- Voltage: 12-120V DC
- SIZE: 148mm DIA x 60mm H
- Current/Energy: 0.25A/2joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: single
- Bulb: Xenon Linear
- Colors: Amber, Blue, Clear, Red
- Enclosure Rating: IP66
- Certificate: CE, E11

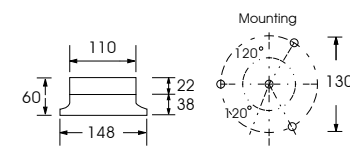

CAX48M STROBE LIGHT

Specifications


- Voltage: 12-120V DC
- SIZE: 148mm DIA x 120mm H
- Current/Energy: 0.38A/3Joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: single
- Bulb: Xenon Linear/Xenon U
- Colors: Amber, Blue, Clear, Red
- Enclosure Rating: IP66
- Certificate: CE

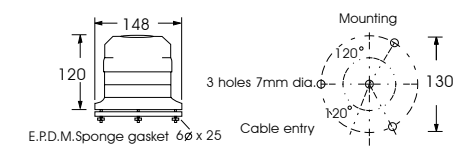

CAX58 STROBE LIGHT

Specifications


- Voltage: 12-80V DC
- Size: 146mm DIA x 116mm H
- Current/Energy: 0.6A/5joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: Single
- Bulb: Xenon linear
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: IP65
- Certificate: CE

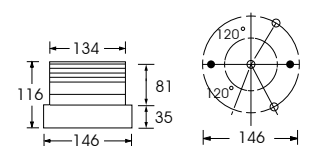

CAX58M STROBE LIGHT

Specifications

- Voltage: 12-80V DC
- Size: 146mm DIA x 116mm H
- Current/Energy: 0.6A/5joules
- Dome Material: Polycarbonate
- Flash Rate: 72/minute
- Flash Pattern: Single
- Bulb: Xenon linear
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: IP65
- Certificate: CE

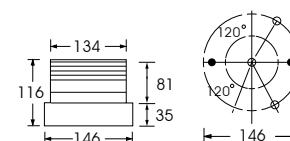

CAX88




CAX88M

CAX88/CAX88M STROBE LIGHT

Specifications

- Voltage: 12-48V DC
- Size: 165mm DIA x 125mm H
- Current/Energy: 2A-3A/16 joules
- Dome Material: Polycarbonate
- Flash Rate: Double(120FPM)/Quad(240FPM)
- Flash Pattern: Double/Quad
- Bulb: Xenon M
- Colors: Amber, Blue, Clear, Red
- Enclosure Rating: IP65
- Certificate: CE, SAE, J1318, J845



HEAVY DUTY STROBE LAMPS

Ching Mars' quality heavy duty strobe lamps come in a variety of sizes to suit your applications. Lamps are ruggedly constructed and available in a size and flash pattern to suit your requirements. Ching Mars strobe lamps are fully certified for legal highway use.




HEAVY DUTY STROBE LAMPS SAE J845



● CAX66/CAX66RM XENON STROBE LIGHT

Specifications


- Voltage: 12-24V DC
- Size: 162mm DIA. x 117mm H
- Current/Energy: High Intensity mode: 2.1 amps@12VDC, 1.0amps@24VDC
- Low Intensity mode: 1.6amps@12VDC, 0.8amps@24VDC
- Energy Output: High intensity mode 17 joules/quad flash, 12 joules/double flash
- Dome Material: Polycarbonate
- Flash Rate: Double flash mode: 66 cycles/minute
- Quad flash mode: 60 cycles/minute
- Bulb: Xenon M
- Enclosure Rating: IP66
- Approval: SAE, ECE R10
- Mounting: CAX66 Permanent/1" NPT threads Pipe Mount
- CAX66RM Vacuum Magnet Mount



● CAX67/CAX67RM XENON STROBE LIGHT

Specifications


- Voltage: 12-24V DC
- Size: 162mm DIA. x 165mm H
- Current/Energy: High Intensity mode: 2.1 amps@12VDC, 1.0amps@24VDC
- Low Intensity mode: 1.6amps@12VDC, 0.8amps@24VDC
- Energy Output: High intensity mode 17 joules/quad flash, 12 joules/double flash
- Dome Material: Polycarbonate
- Flash Rate: Double flash mode: 66 cycles/minute
- Quad flash mode: 60 cycles/minute
- Bulb: Xenon M
- Approval: SAE, ECE R10
- Mounting: CAX66 Permanent/1" NPT threads Pipe Mount
- CAX66RM Vacuum Magnet Mount



● CAX78/CAX78RM STROBE LIGHT

Specifications


- Voltage: 12-48V DC
- Size: 162mm DIA x 160mm H
- Current/Energy: 2A-3A/12 joules
- Dome Material: Polycarbonate
- Flash Rate: Double(120FPM) ; Quad(60 cycles/minute)
- Flash Pattern: Double or Quad
- Bulb: Xenon M



● CAX67 XENON STROBE LIGHT

Specifications

- Voltage: 12-24V DC
- Size: 162mm DIA. x 165mm H
- Current/Energy: High Intensity mode: 2.1 amps@12VDC, 1.0amps@24VDC
- Low Intensity mode: 1.6amps@12VDC, 0.8amps@24VDC
- Energy Output: High intensity mode 17 joules/quad flash, 12 joules/double flash
- Dome Material: Polycarbonate
- Flash Rate: Double flash mode: 66 cycles/minute
- Quad flash mode: 60 cycles/minute
- Bulb: Xenon M
- Approval: SAE, ECE R10
- Mounting: CAX66 Permanent/1" NPT threads Pipe Mount
- CAX66RM Vacuum Magnet Mount




HEAVY DUTY STROBE LAMPS SAE J845



● CAX68 STROBE LIGHT

Specifications


- Voltage: 12-48V DC
- Size: Ø224mm DIA x 190mm H
- Current/Energy: 2A-3A/16 joules
- Dome Material: Polycarbonate
- Base: Aluminum
- Flash Rate: Single (60FPM)/quad(60 cycles/minute)
- Flash Pattern: Single/quad
- Bulb: Xenon M
- Colors: Amber, Blue, Clear, Red
- Certificate: CE, SAE J1318, E13

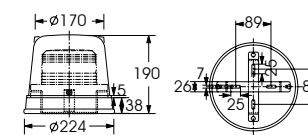

● CAX65N STROBE LIGHT

Specifications


- Voltage: 12-48V DC
- Size: 162mm DIA x 117mm H
- Current/Energy: 2A-3A/12 joules
- Dome Material: Polycarbonate
- Flash Rate: Double(120FPM) ; Quad(60 cycles/minute)
- Flash Pattern: Double or Quad
- Bulb: Xenon M
- Enclosure Rating: IP66
- Colors: Amber, Blue, Clear, Red
- Certificate: CE, SAE J1318, E13



● CAX65NRM STROBE LIGHT

Specifications

- Voltage: 12-48V DC
- Size: 210mm DIA x 145mm H
- Current/Energy: 2A-3A/12 joules
- Dome Material: Polycarbonate
- Flash Rate: Double(120FPM) ; Quad(60 cycles/minute)
- Flash Pattern: Double or Quad
- Bulb: Xenon M
- Enclosure Rating: IP66
- Colors: Amber, Blue, Clear, Red
- Mounting: RUBBER SUCTION W/MAGNET
- Enclosure Rating: IP65
- Certificate: CE, SAE J1318, E13



HEAVY DUTY STROBE LAMPS



MULTI VOLTAGE LED WARNING LAMPS

Ching Mars' line of LED warning lamps feature heavy duty designs, low amp draws, low maintenance. These lamps come in a variety of designs to suit your applications both industrial and certified road use.




MULTI VOLTAGE LED STROBE BEACONS



● **CTO15N-LED-110V**
LED STROBE LIGHT

Specifications


- Voltage: 12-110V DC
- Size: 97mm DIA x 130mm H
- Current/Energy: 0.2A/LED 1W x 3pcs
- Dome Material: Polycarbonate
- Flash Rate: 8 Flashes (50FPM)
- Colors: Amber, Red, Blue, Clear
- Certificate: CE, ECE R10

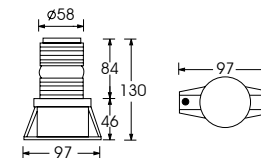

● **CAX110-LED**
LED STROBE LIGHT

Specifications


- Voltage: 12-110V DC
- Size: 139mm L x 65mm W x 67mm H
- Current/Energy: 0.2A/LED x 27pcs.
- Dome Material: Polycarbonate
- Flash Rate: 8 Flashes (36FPM)
- Colors: Amber, Red, Blue, Clear



● **CAX46-LED**
LED STROBE LIGHT

Specifications


- Voltage: 12-80V DC
- Size: 148mm DIA x 60mm H
- Current/Energy: 0.45A
- Dome Material: Polycarbonate
- Flash Rate: 8 Flashes (36FPM)
- Flash Pattern: Single
- Colors: Amber, Blue, Clear, Red
- Enclosure Rating: IP66
- Certificate: CE, E11

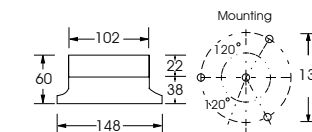

● **CAX48A-LED**
LED STROBE LIGHT

Specifications

- Voltage: 12-120V DC
- Size: 148mm DIA x 120mm H
- Current/Energy: 0.5A
- Dome Material: Polycarbonate
- Flash Rate: Double (75/minute)
- Quick Flash (52/minute)
- Rotating (100RPM)
- Flash Pattern: Double/Quick Flash/Rotating
- Colors: Amber, Blue, Clear, Red
- Enclosure Rating: IP66
- Certificate: CE, ECE R10

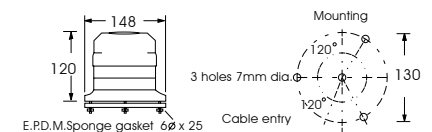


MULTI VOLTAGE LED STROBE BEACONS



● **CAX45-LED-110V**
LED STROBE LIGHT

Specifications


- Voltage: 12-110V DC
- Size: 128mm DIA x 90mm H
- Current Draw/12V: 0.2A LED 1W x 3pcs
- Current Draw/110V: 0.07A LED 1W x 3PCS
- Dome Material: Polycarbonate
- Flash Rate/110V: 8 Flashes (36FPM)
- Colors: Amber, Red, Blue, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE

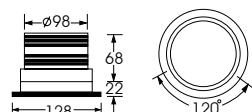

● **CAX45-LED-40V**
LED STROBE LIGHT

Specifications

- Voltage: 12-40V DC
- Size: 128mm DIA x 90mm H
- Current Draw/40V: 0.2A/LED 1W x 3pcs
- Dome Material: Polycarbonate
- Flash Rate/40V: 8 Flashes (36FPM)
- Colors: Amber, Red, Blue, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL, ECE R10

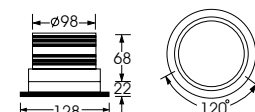

● **CAX45M-LED**
LED STROBE LIGHT

Specifications

- Voltage: CAX45M-LED-40V, 12-40VDC
- Size: 128mm DIA x 90mm H
- Current Draw/40V: 0.2A/LED 1W x 3pcs
- Current Draw/110V: 0.07A/LED 1W x 3pcs
- Dome Material: Polycarbonate
- Flash Rate/40V: 8 Flashes (36FPM)
- Flash Rate/110V: 8 Flashes (36FPM)
- Colors: Amber, Red, Blue, Clear
- Enclosure Rating: IP66
- Certificate: CE, UL, ECE R10




MULTI VOLTAGE LED STROBE BEACONS



● **CTO15A-LED**
LED STROBE LIGHT

Specifications


- Voltage: 120V AC
- Size: 72mm DIA x 165 mm H
- Current/Energy: 0.01A
- Dome Material: Polycarbonate
- Flash Rate: 8 Flashes (36FPM)
- Mounting: E27 Screw in
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL



● **CTO15B-LED**
LED STROBE LIGHT

Specifications


- Voltage: 12-80V DC
- Size: 72mm DIA x 162 mm H
- Current/Energy: 0.2A
- Dome Material: Polycarbonate
- Flash Rate: 8 Flashes (36FPM)
- Mounting: 1/2" Thread w/Locknut male
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL



● **CTO15C-LED**
LED STROBE LIGHT

Specifications


- Voltage: 120V AC
- Size: 72mm DIA x 162 mm H
- Current/Energy: 0.01A
- Dome Material: Polycarbonate
- Flash Rate: 8 Flashes (36FPM)
- Mounting: 1/2" Thread w/Locknut female
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL

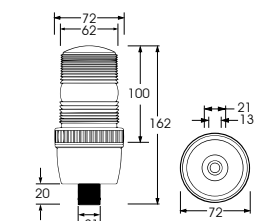

● **CTO15F-LED**
LED STROBE LIGHT

Specifications

- Voltage: 120V AC
- Size: 72mm DIA x 160 mm H
- Current/Energy: 0.01A
- Dome Material: Polycarbonate
- Flash Rate: 8 Flashes (36FPM)
- Mounting: 1/2" Thread w/Locknut female
- Colors: Amber, Blue, Red, Clear
- Enclosure Rating: NEMA4X, IP66
- Certificate: CE, UL

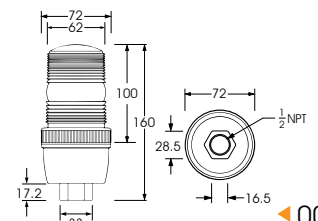

LED WARNING BEACONS

SAE J845 & ECE R65

Ching Mars' fully certified SAE and ECE rotating beacons feature LED technology, designed for maximum visibility with low maintenance, low amp draw and sturdy construction. Available with selectable patterns and colours. Ching Mars' high quality beacons are your best choice.




LED WARNING BEACONS



● **CAX48M-LED**
MAGNETIC LED BEACON LIGHTS

Specifications


- Voltage: 12-110V DC
- Size: 148mm DIA x 120mm H
- LED Type: 0.5W x 24pcs
- Current/Energy: 0.5A
- Flash Pattern: Double, Quad, Rotating
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber, Red, Blue, Green, Clear
- Mounting: Flat Mount, 3 Mounting Holes
- Enclose Rating: IP66

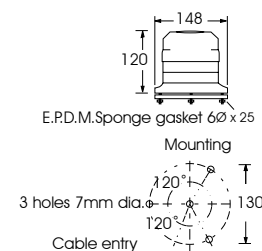

● **CAX58-LED**
LED BEACON LIGHTS

Specifications


- Voltage: 12-40V DC
- Size: 146mm DIA x 116mm H
- LED Type: LED 2W x 8pcs
- Current/Energy: 0.4-1.2A
- Flashes Patterns: 6 Flashes
- Colors: Amber, Red
- Dome Material: Polycarbonate
- Base: Rubber
- Mounting: 2 Bolts
- Enclose Rating: IP65
- Certificate: SAE J845 Class 2



● **CAX58M-LED**
MAGNETIC LED BEACON LIGHTS

Specifications


- Voltage: 12-40V DC
- Size: 146mm DIA x 116mm H
- LED Type: LED 2W x 8pcs
- Current/Energy: 0.4-1.2A
- Flash Patterns: 6 Flashes
- Colors: Amber, Red
- Dome Material: Polycarbonate
- Base: Rubber
- Mounting: Magnetic
- Enclose Rating: IP65
- Certificate: SAE J845 Class 2




● **CAX75LED**
LED BEACON LIGHTS

Specifications

- Voltage: 12-40V DC
- Size: 165mm DIA x 125mm H
- LED Type: 4 LED 1W x 4
- Current/Energy: 0.5A
- Flash Patterns: 6 Flashes
- Dome Material: Polycarbonate
- Base: ABS
- Mounting: Flat Mount, 3 Mounting Holes
- Colors: Amber, Red, Blue
- Enclose Rating: IP65



CAX70-LED




● **CAX70**
LED BEACON LIGHTS

Specifications

- Voltage: 12-36V DC
- Size: 164mm DIA x 95mm H
- LED Type: 3W x 12pcs
- Current/Energy: 3A MAX
- Flash Pattern: Single, Double, Triple, Quad, Rotating
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber, Red, Blue, Green, Clear
- Mounting: Flat Mount, 3 Mounting Holes
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ERE R65



CAX70M-LED




● **CAX70M**
MAGNETIC LED BEACON LIGHTS

Specifications

- Voltage: 12-36V DC
- Size: 164mm DIA x 95mm H
- LED Type: 3W x 6pcs
- Current/Energy: 3A MAX
- Flash Pattern: Single, Double, Triple, Quad, Rotating
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber, Red, Blue, Green, Clear
- Mounting: Magnetic
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ERE R65



CAX70D-LED




● **CAX70D**
LED BEACON LIGHTS

Specifications

- Voltage: 12-36V DC
- Size: 164mm DIA x 181mm H
- LED Type: 3W x 12pcs
- Current/Energy: 3A MAX
- Flash Pattern: Single, Double, Triple, Quad, Rotating
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber, Red, Blue, Green, Clear
- Mounting: Din Mount
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ERE R65



CAX70V2-LED
(CAX70V2-1236LED-YB)



● **CAX70V2(CAX70V2-1236LED-YB)**
DUAL COLOR LED LED BEACON LIGHTS

Specifications


- Voltage: 12-36V DC
- Size: 164mm DIA x 95mm H
- LED Type: 3W x 24pcs (Amber: 12pcs; Blue: 12pcs)
- Current/Energy: 3.1A MAX
- Flash Pattern: Rotating, Double Quad, Double Cross, Quad Cross
- Dome Material: Polycarbonate
- Base: ABS
- Lens Colors: Clear
- Mounting: Flat Mount, 3 Mounting Holes
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1



● **CAX71-LED**
LED BEACON LIGHTS

Specifications


- Voltage: 12-24V DC
- Size: 164mm DIA x 128.5 mm H
- LED Type: 3W x 8pcs
- Current/Energy: 1A (MAX)
- Flash Pattern: Single, Double, Triple, Quad, Quint, Rotating
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber
- Mounting: Flat Mount, 3 Mounting Holes
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1



● **CAX71M-LED**
MAGNETIC LED BEACON LIGHTS

Specifications


- Voltage: 12-24V DC
- Size: 164mm DIA x 128.5 mm H
- LED Type: 3W x 8pcs
- Current/Energy: 1A (MAX)
- Flash Pattern: Single, Double, Triple, Quad, Quint, Rotating
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber
- Mounting: Magnetic
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1



● **CAX88-LED**
LED BEACON LIGHTS

Specifications


- Voltage: 12-40V DC
- Size: 165mm dia. x 125mm H
- LED Type: LED 2W x 8pcs.
- Current/Energy: 0.8A
- Flash Pattern: 6 Flashes
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber, Red, Blue
- Mounting: Flat Mount, 3 Mounting Holes
- Enclose Rating: IP65
- Certificate: SAE J845 Class2



● **CAX88M-LED**
MAGNETIC LED BEACON LIGHTS

Specifications

- Voltage: 12-40V DC
- Size: 165mm dia. x 125mm H
- LED Type: LED 2W x 8pcs.
- Current/Energy: 0.8A
- Flash Pattern: 6 Flashes
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber, Red, Blue
- Mounting: Magnetic
- Enclose Rating: IP65
- Certificate: SAE J845 Class2




HEAVY LED WARNING BEACONS



● **CAX67N-LED**
LED BEACON LIGHTS

Specifications


- Voltage: 12-24V DC
- Size: 162mm DIA x 165mm H
- LED Type: 3W x 12pcs
- Current/Energy: 2.5A
- Flash Pattern: Single, Double, Triple, Quad, Quint, Rotating
- Dome Material: Polycarbonate
- Base: Aluminum
- Colors: Amber, Red, Blue, Green, Clear
- Mounting: Permanent & 1" NPT Threads Pipe Mounting Enclose
- Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65



● **CAX67NRMLED**
MAGNETIC LED BEACON LIGHTS

Specifications


- Voltage: 12-24V DC
- Size: 210mm DIA x 193mm H
- LED Type: 3W x 12pcs
- Current/Energy: 2.5A
- Flash Pattern: Single, Double, Triple, Quad, Quint, Rotating
- Dome Material: Polycarbonate
- Base: Aluminum
- Colors: Amber, Red, Blue, Green, Clear
- Mounting: Rubber Suction W/magnet
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65



● **CAX67NV2-LED**
DUAL COLOR LED BEACON LIGHTS

Specifications


- Voltage: 12-24V DC
- Size: 162mm DIA x 165mm H
- LED Type: 3W x 24pcs (Amber: 12pcs; Blue: 12pcs)
- Current/Energy: 2.5A
- Flash Pattern: 17 Patterns
- Dome Material: Polycarbonate
- Base: Aluminum
- Colors: Amber, Red, Blue, Green, Clear
- Mounting: Permanent & 1" NPT Threads Pipe Mounting
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65



● **CAX69LED**
LED BEACON LIGHTS

Specifications


- Voltage: 12-24V DC
- Size: 164.5mm Dia. x 189mm H
- LED Type: 3W LED x 12pcs
- Current/Energy: 2.5A
- Flash Pattern: Single, Double, Triple, Quad, Quint, Rotating
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber
- Mounting: 3 Bolts
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65

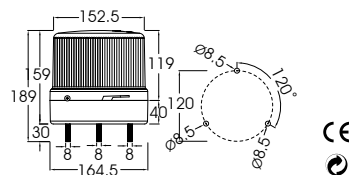

● **CAX69DLED**
LED BEACON LIGHTS

Specifications

- Voltage: 12-24V DC
- Size: 164.5mm Dia. x 240.5mm H
- LED Type: 3W LED x 12pcs
- Current/Energy: 2.5A
- Flash Pattern: Single, Double, Triple, Quad, Quint, Rotating
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber
- Mounting: Din Mount
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65

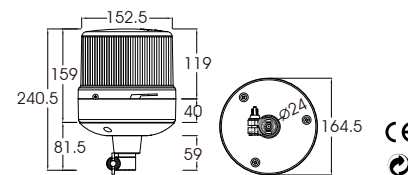


HEAVY DUTY LED WARNING BEACONS



● **CAX66LED**
LED BEACON LIGHTS

Specifications


- Voltage: 12-24V DC
- Size: 162mm DIA x 117mm H
- LED Type: 3W x 12pcs
- Current/Energy: 2.5A
- Flash Rate: Single, Double, Triple, Quad, Quint, Rotating
- Dome Material: Polycarbonate
- Base: Aluminum
- Colors: Amber
- Mounting: Permanent & 1" NPT Threads Pipe Mounting
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65



● **CAX66LEDNRM**
MAGNETIC LED BEACON LIGHTS

Specifications


- Voltage: 12-24V DC
- Size: 210mm DIA x 128mm H
- LED Type: 3W x 12pcs
- Current/Energy: 2.5A
- Flash Pattern: Single, Double, Triple, Quad, Quint, Rotating
- Dome Material: Polycarbonate
- Base: Aluminum
- Colors: Amber
- Mounting: Rubber Suction w/magnet
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65



● **CAX76LED**
LED ROTATING BEACON LIGHTS

Specifications


- Voltage: 12-40V DC
- Size: 165 mm DIA x 125mm H
- LED Type: 2W x 8pcs
- Current/Energy: 0.6A
- Flash Rate: 120/minute
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber, Red, Blue, Green
- Mounting: Flat Mount, 3 Mounting Holes
- Enclose Rating: IP65
- Certificate: SAE J845 Class2



● **CAX76MLED**
MAGNETIC LED ROTATING BEACON LIGHTS

Specifications

- Voltage: 12-40V DC
- Size: 165 mm DIA x 125mm H
- LED Type: 2w x 8pcs
- Current/Energy: 0.6A
- Flash Rate: 120/minute
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber, Red, Blue, Green
- Mounting: Magnetic
- Enclose Rating: IP65
- Certificate: SAE J845 Class2






LED WARNING BEACONS



● **CG80LED**
LED BEACON LIGHTS

Specifications


- Voltage: DC12-40V, AC 110V, 220V
- Size: 138.8mm DIA x 180mm H
- LED Type: 1W x 4pcs
- Current/Energy: DC/0.5A, AC/0.05A
- Flash Pattern: 6 Flashes
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber, Red, Blue, Green
- Mounting: 3 Bolts
- Enclose Rating: IP66



● **CG90LED**
LED ROTATING LIGHT

Specifications

- Voltage: DC12-40V, AC 110V, 220V
- Size: 138.8mm DIA x 180mm H
- LED Type: 1W x 8pcs
- Current/Energy: DC/0.35A, AC/0.05A
- Flash Rate: 120RPM
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber, Red, Blue, Green
- Mounting: 3 Bolts
- Enclose Rating: IP66




HEAVY DUTY LED WARNING BEACONS



● **CAX68NLED**
LED BEACON LIGHTS

Specifications


- Voltage: 12-40V DC
- Size: 224mm DIA x 197mm H
- LED Type: Class1: LED 2W x 8pcs /Class2: 1W x 4pcs
- Current/Energy: 0.4A
- Flash Pattern: 6 Flashes
- Dome Material: Polycarbonate
- Base: Aluminum
- Colors: Amber
- Mounting: Flat Mount w/ 2 Through Bolts
- Certificate: SAE J845 CLASS 1/SAE J845 CLASS 2

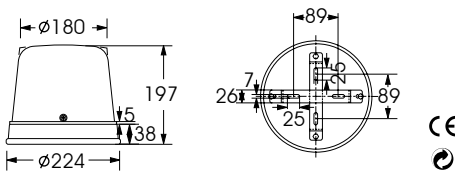

● **CAX68NEW-LED**
LED BEACON LIGHTS

Specifications

- Voltage: 12-36V DC
- Size: 224mm DIA x 197mm H
- LED Type: LED 0.5W x 72 pcs
- Current/Energy: 2.5A
- Flash Pattern: Single, Double, Triple, Quad, Quint, Rotating: Fast, Slow
- Dome Material: Polycarbonate
- Base: Aluminum
- Colors: Amber
- Mounting: Flat Mount w/ 2 Through Bolts
- Certificate: SAE J845 CLASS 1

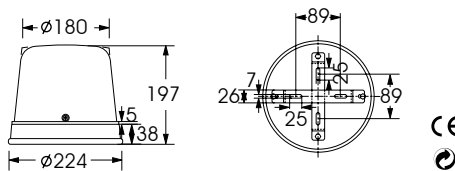


RECHARGEABLE BEACONS



● **CAX70BA**
RECHARGEABLE LED BEACON LIGHTS

Specifications


- Voltage: AC110/220V DC12/24V
- Size: 124mm x 146mm x 132mm H
- LED Type: 3W x 12pcs
- Current/Energy: 2.56A@12.6V(Working)
- Charging Current: 12V: 0.7A, 24V: 0.35A
- Flash Pattern: Single, Double, Triple, Quad, Rotating
- Dome Material: Polycarbonate
- Base: ABS
- Colors: Amber
- Mounting: Magnetic
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ERE R65



● **3026BA**
RECHARGEABLE BEACON LIGHTS

Specifications

- Voltage: DC12/24V
- Size: 114mm x 136mm x 79.5mmH
- LED Type: 0.5W x 42pcs
- Current/Energy: 0.4A(Charging)
- Flash Pattern: 10
- Dome Material: Polycarbonate
- Base: Polycarbonate
- Colors: Amber
- Mounting: Magnetic
- Enclose Rating: IP67
- Certificate: SAE J845 Class 1, ERE R65



LED WARNING ARROWS /LIGHT STICKS/LIGHT BARS

ISO 9001 : 2008 (CNS 12681) SAE C E E13



LED WARNING ARROWS



LPF-ARROW-12L



LPF-ARROW-16L




LPF-ARROW-18L

Specifications

- Voltage: 12-24V DC
- 8 Flash Patterns – SAE J595 Class 1 on 2 Flashes
- Aluminum Housing & Polycarbonate Lens
- Control Box with Lamp Activation & Flash Selection Switch
- 12-3/4 ft. Wire from the Light Bar & 10" Wire from the Control Box
- Mount with "L" OR "T" Brackets (Included)
- Color options: Amber, Red, Blue, Green, White



• LPF-Control Box

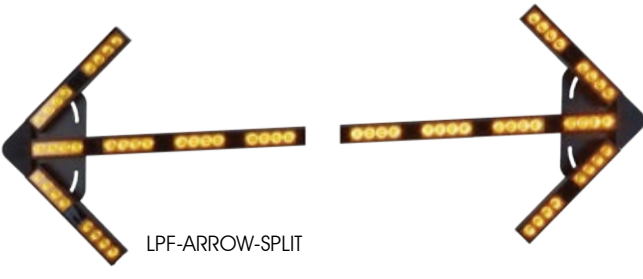

LPF-ARROW-SPLIT

ISO 9001 : 2008 (CNS 12681) SAE C E E13

ITEM	Lamp Dimension	LED/Light Heads	Max. Current	Length
LPF-ARROW-12L	1144 x 235 x 39MM	4X1W / 12 PCS	2.2@12V	45"
LPF-ARROW-16L	1144 x 445 x 39MM	4X1W / 16 PCS	2.4@12V	45"
LPF-ARROW-18L	1453 x 445 x 39MM	4X1W / 18 PCS	2.8@12V	57.2"
LPF-ARROW-SPLIT	582 x 445 x 39MM (1PC)	4X1W / 8 PCS (1PC)	2.4@12V	23" (1PC)

LIGHT BARS/LIGHT STICKS



LPF-220D



LPF-430D



LPF-400S



LPF-610S

Specifications

- Voltage: 12-24V DC
- 8 Flash Patterns – SAE J595 Class 1 on 2 Flashes
- Aluminum Housing & Polycarbonate Lens
- Control Box with Lamp Activation & Flash Selection Switch
- 12-3/4 ft. Wire from the Light Bar & 10" Wire from the Control Box
- Mount with "L" OR "T" Brackets (Included)
- Color options: Amber, Red, Blue, Green, White



• LPF-Control Box

ISO 9001 : 2008 (CNS 12681) SAE C E E13

ITEM	Lamp Dimension	LED/Light Heads	Max. Current	Length
LPF-300S	768 x 37 x 39MM	4X1W / 6 PCS	1.3@12V	30"
LPF-400S	1034 x 37 x 39MM	4X1W / 8 PCS	1.6@12V	40"
LPF-510S	1300 x 37 x 39MM	4X1W / 10 PCS	1.9@12V	54"
LPF-610S	1566 x 37 x 39MM	4X1W / 12 PCS	2.2@12V	61"
LPF-200D	562 x 137 x 36MM	4X1W / 10 PCS	1.6@12V	22"
LPF-430D	1094 x 137 x 36MM	4X1W / 18 PCS	2.2@12V	43"
LPF-540D	1360 x 137 x 36MM	4X1W / 22 PCS	2.5@12V	54"

Mini LED Warning Light Bars

Meets SAE CLASS 1 & ECE R65 ECE R10

SAFETY AND EFFICIENCY

ISO 9001 : 2015 (CNS 12681:2016) SAE CE E6



MINI LED WARNING LIGHT BARS



● **LPF380D**
LED MINI LIGHT BAR

Specifications

- Voltage: 12-24V DC
- Size: 380mm DIA x 240mm x 50mm H
- LED Type: 1W x 32pcs
- Current/Energy: 3A MAX
- Flash Pattern: 20 flash patterns
- Dome Material: Polycarbonate
- Base: ABS
- Mounting: Permanent or Magnetic version or Single Bolt
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65



● **LPF380DM**
MAGNETIC LED MINI LIGHT BAR

Specifications

- Voltage: 12-24V DC
- Size: 380mm DIA x 240mm x 66.5mm H
- LED Type: 1W x 32pcs
- Current/Energy: 3A MAX
- Flash Pattern: 20 Flash patterns
- Dome Material: Polycarbonate
- Base: ABS
- Mounting: Magnetic
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65





MINI LED WARNING LIGHT BARS



● **LPF100**
LED MINI LIGHT BAR

Specifications

- Voltage: 12-24V DC
- Size: 248mm DIA x 172mm x 41mm H
- LED Type: 1W X 24pcs
- Current/Energy: 1.8A MAX
- Flash Pattern: 30 Flash Patterns
- Dome Material: Polycarbonate
- Base: ABS
- Mounting: Brackets Mount
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65

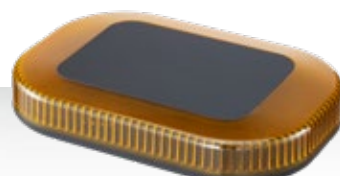

● **LPF100M**
MAGNETIC LED MINI LIGHT BAR

Specifications

- Voltage: 12-24V DC
- Size: 248mm DIA x 172mm x 50mm H
- LED Type: 1W X 24pcs
- Current/Energy: 1.8A MAX
- Flash Pattern: 30 Flash Patterns
- Dome Material: Polycarbonate
- Base: ABS
- Mounting: Magnetic
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65



● **LPF100S**
DUAL COLOR LED MINI LIGHT BAR

Specifications


- Voltage: 12-24V DC
- Size: 248mm DIA x 172mm x 41mm H
- LED Type: 1W X 24pcs (Y: 12pcs, B: 12pcs)
- Current/Energy: 1.8A MAX
- Flash Pattern: 30 Flash Patterns
- Dome Material: Polycarbonate
- Base: ABS
- Mounting: Brackets Mount
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65



● **LPF380V2**
DUAL COLOR LED MINI LIGHT BAR

Specifications

- Voltage: 12-24V DC
- Size: 380mm DIA x 240mm x 50mm H
- LED type: 1W x 64pcs (Y: 32PCS, B: 32PCS)
- Current/Energy: 3A MAX
- Flash Pattern: 17 Flash Patterns
- Dome Material: Polycarbonate
- Base: ABS
- Mounting: Permanent or Magnetic version or Single Bolt
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65



● **LPF380BAT**
RECHARGABLE MAGNETIC LED MINI LIGHT BAR

Specifications

- Voltage: 12-24V DC, 110/220V AC
- Size: 380mm DIA x 240mm x 66.5mm H
- LED Type: 1W x 64pcs (Y: 32PCS, B: 32PCS)
- Current/Energy: 12V:2A, 24V:1A
- Flash Pattern: 13 Flash Patterns Selected by Remote Control or Touch Pad Switch
- Dome Material: Polycarbonate
- Base: ABS
- Mounting: Magnetic
- Enclose Rating: IP66
- Certificate: SAE J845 Class 1, ECE R65




LED WARNING LIGHT BARS



LB LED LIGHT BAR SERIES
LED LIGHT BAR

Specifications

- Voltage: 12-24V DC
- Current/Energy: 5.2A (48")
- Flash Pattern: 17
- Dome Material: Polycarbonate
- Base: Polycarbonate
- Colors: Amber, White, Blue, Red, Green
- Mounting: Brackets mount
- Enclose Rating: IP X6

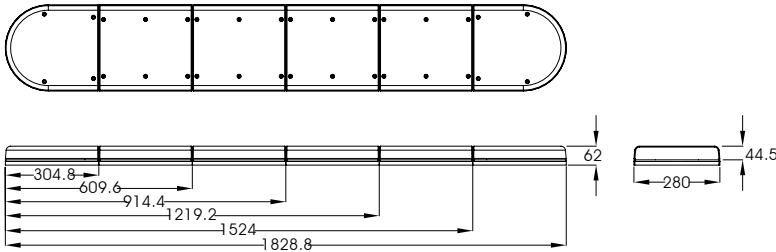

Item Number	Length	Dimensions (L x W x H)	LED Power & Quantity
LB240	24"	609.6 x 280 x 65 mm	3W/48 pcs
LB360	36"	914.4 x 280 x 65 mm	3W/72 pcs
LB480	48"	1219.2 x 280 x 65 mm	3W/96 pcs
LB600	60"	1524 x 280 x 65 mm	3W/120 pcs
LB720	72"	1828.8 x 280 x 65 mm	3W/144 pcs



DIRECTIONAL LED WARNING LIGHTS



LPF6
LED MINI LIGHTHEADS

Specifications

- Voltage: 12-24V DC
- Size: 135mm x 32mm x 17.2mm
- LED type: 1W x 6pcs
- Current/Energy: 0.7A MAX
- Flash Pattern: 14
- Dome Material: Polycarbonate
- Base: Aluminum
- Mounting: Flat surface mount
- Enclose Rating: IP67
- Certificate: SAE J595 CLASS 1

LPF6 DUAL COLOR
LED MINI LIGHTHEADS

Specifications

- Voltage: 12-24V DC
- Size: 135mm x 32mm x 17.2mm
- LED type: 1W x 12pcs
- Current/Energy: 0.7A MAX
- Flash Pattern: 17
- Dome Material: Polycarbonate
- Base: Aluminum
- Mounting: Flat surface mount
- Enclose Rating: IP67
- Certificate: SAE J595 CLASS 1



LMH3
LED MINI LIGHTHEADS

Specifications

- Voltage: 12-24V DC
- Size: 88mm x 30mm x 6.2mm
- LED type: 1W x 3pcs
- Current/Energy: 0.4A MAX
- Flash Pattern: 12
- Dome Material: Polycarbonate
- Base: Aluminum
- Mounting: Flat surface mount
- Enclose Rating: IP67
- Certificate: SAE J595 CLASS 1

LMH6
LED MINI LIGHTHEADS

Specifications

- Voltage: 12-24V DC
- Size: 131mm x 30mm x 6.2mm
- LED type: 1W x 6pcs
- Current/Energy: 0.7A MAX
- Flash Pattern: 23
- Dome Material: Polycarbonate
- Base: Aluminum
- Mounting: Flat surface mount
- Enclose Rating: IP67
- Certificate: SAE J595 CLASS 1


LED WARNING BEACONS



CAX41
LED BEACON LIGHTS

Specifications


- Voltage: 10-30V DC
- Size: 130 mm DIA 83 mm H
- LED type: 1W x 36 pcs
- Current/Energy: 3A(MAX)
- Flash Pattern: 12
- Dome Material: PC
- Base: ABS
- Colors: Amber
- Mounting: 3 Bolts mount
- Enclose Rating: IP67
- Certificate: SAE J845 CLASS 1, R65 CLASS 1

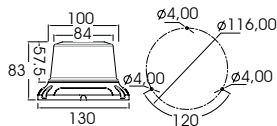

CAX41M
LED BEACON LIGHTS

Specifications


- Voltage: 10-30V DC
- Size: 130 mm DIA 95 mm H
- LED type: 1W x 36 pcs
- Current/Energy: 3A(MAX)
- Flash Pattern: 12
- Dome Material: PC
- Base: ABS
- Colors: Amber
- Mounting: Magnet mount
- Enclose Rating: IP67
- Certificate: SAE J845 CLASS 1, R65 CLASS 1



CAX41D
LED BEACON LIGHTS

Specifications


- Voltage: 10-30V DC
- Size: 104.5 mm DIA 173 mm H
- LED type: 1W x 36 pcs
- Current/Energy: 3A(MAX)
- Flash Pattern: 12
- Dome Material: PC
- Base: ABS
- Colors: Amber
- Mounting: Din mount
- Enclose Rating: IP67
- Certificate: SAE J845 CLASS 1, R65 CLASS 1

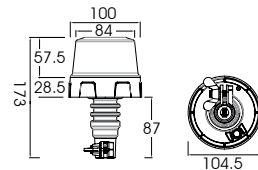

CAX46LED
LED BEACON LIGHTS

Specifications


- Voltage: 12-80 V DC
- Size: 146.6mm DIA x 62.8mm H
- LED type: 1W x 30 pcs
- Current/Energy: 2.8A
- Flash Pattern: 4
- Dome Material: Polycarbonate
- Base: Polycarbonate
- Colors: Amber
- Mounting: 3 Bolts mount
- Enclose Rating: IP66
- Certificate: SAE J845 CLASS 1

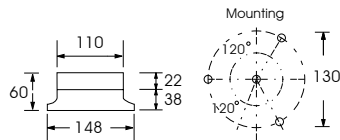

LPF-9820
MINI LIGHT BAR

Specifications

- Voltage: 12/24V DC
- Size: 248 x 171 x37 mm H
- LED type: 3W x 30pcs
- Current/Energy: 12V/2A; 24V/1.8A
- Flash Pattern: 22
- Dome Material: Polycarbonate
- Base: ABS
- Mounting: Brackets Mount
- Enclose Rating:
- Certificate: Certificate: SAE CLASS 1, ECE R65, EMC approved



CHING MARS is a leading manufacturer in Taiwan specializing in a variety of **warning** and **multi-purposed LED strobe beacons** for commercial vehicles of all kinds. The company provides quality products and services to customers around the world from a wide range of markets including material handling, mining, construction, towing and utilities.

NEW 13 Warning FLASH MODES

PART #	DESCRIPTION
LS - 120	12" LED LIGHT STRIPS
LS - 240	24" LED LIGHT STRIPS
LS - 480	48" LED LIGHT STRIPS
LS - 600	60" LED LIGHT STRIPS
LS - CONTBOX	CONTROL BOX 12-24VDC



- Voltage: 12-24VDC
- Color: Amber, Blue, Green, White
- Light Source: 6 LEDs per foot
- Current Draw: Max 5A (Controller)
- Lens: Highly Flexible, Water Resistant Silicone
- Mount: 3M adhesive back
- Certifications: IP67, CE

SECURITY STROBES

SECURITY STROBES





SL6-12/SL8-12
STROBE LIGHT

SL6-12-LED/SL8-12-LED
LED STROBE LIGHT

FLASH RATE: XENON 130/MINUTE
LED 120/MINUTE
Dome Color: Amber, Blue, Clear, Red

Specifications

- Voltage: 12/24V DC
- Size: 100mm DIA x 80mm H
- Current/Xenon: 0.25A/3 Joules
- Current/LED: 70mA
- Dome Material: Polycarbonate
- Flash Pattern: Single
- Bulb: Xenon U/LED x 12pcs



CAX35/CAX35M
MAGNETIC STROBE LIGHT

Flash Rate: 12V:130/minute 24V:90/minute
Dome Color: Amber, Blue, Red


Specifications

- Item No. : CAX35-12
- Voltage: DC12V
- Bulb: XENON
- Current/Energy: 0.25A

- Item No. : CAX35-24
- Voltage: DC24V
- Bulb: XENON
- Current/Energy: 0.09A

- Item No. : CAX35M-12
- Voltage: DC12V
- Bulb: XENON
- Current/Energy: 0.25A

- Item No. : CAX35M-24
- Voltage: DC24V
- Bulb: XENON
- Current/Energy: 0.09A



CAX45M/SL122M
MAGNETIC STROBE LIGHT

Flash Rate: 12V: 130/minute 24V:90/minute
Dome Color: Amber, Blue, Red, Clear


Specifications

- Item No. : CAX45M-12
- Voltage: DC12V
- Bulb: XENON
- Current/Energy: 0.25A

- Item No. : CAX45M-80
- Voltage: 12V-80V
- Bulb: XENON
- Current/Energy: 0.29~0.04A

- Item No. : SL122M-12
- Voltage: DC12V
- Bulb: XENON
- Current/Energy: 0.25A

- Item No. : SL122M-24
- Voltage: DC24V
- Bulb: XENON
- Current/Energy: 0.09A

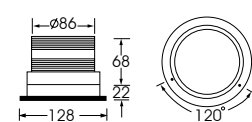

CAX30/CAX30M
MINI STROBE LIGHT

Flash Rate: 12V:130/minute 24V:60/minute
Dome Color: Amber, Blue, Red, Clear


Specifications

- Item No. : CAX30-12
- Voltage: DC12V
- Bulb: XENON
- Current/Energy: 0.23A

- Item No. : CAX30-24
- Voltage: DC24V
- Bulb: XENON
- Current/Energy: 0.17A

- Item No. : CAX30M-12
- Voltage: DC12V
- Bulb: XENON
- Current/Energy: 0.23A

- Item No. : CAX30M-24
- Voltage: DC24V
- Bulb: XENON
- Current/Energy: 0.17A




SL30
STROBE LIGHT

Flash Rate: 12V: 100/minute 24V:120/minute
Dome Color: Amber, Blue, Red, Clear

Specifications

- Item No. : SL30-12
- Voltage: DC12V
- Bulb: XENON
- Current/Energy: 0.13A

- Item No. : SL30-24
- Voltage: DC24V
- Bulb: XENON
- Current/Energy: 0.09A




AC POWER STROBES



- **D200**
STROBE LIGHT
- Flash Rate: 100/minute
Dome Color:
Amber, Blue, Red, Green, Clear
- Specifications**
- Item No. : D200-12
 - Voltage: DC12V
 - Bulb: XENON
 - Current: 0.25A
 - Flash/Min: 130/MIN

- Item No. : D200-24
- Voltage: DC24V
- Bulb: XENON
- Current: 0.09A
- Flash/Min: 90/MIN


- Item No. : D200-110
- Voltage: AC 110V
- Bulb: XENON
- Current: 0.06A
- Flash/Min: 92/MIN

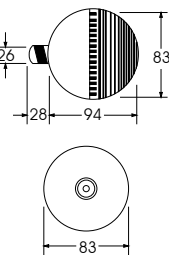

- **D800**
STROBE LIGHT
- Flash Rate: 100/minute
Dome Color:
Amber, Blue, Red, Green, Clear
- Specifications**
- Item No. : D800-12
 - Voltage: DC12V
 - Bulb: XENON
 - Current: 0.25A
 - Flash/Min: 130/MIN


- Item No. : D800-24
- Voltage: DC24V
- Bulb: XENON
- Current: 0.09A
- Flash/Min: 90/MIN

- Item No. : D800-110
- Voltage: AC 110V
- Bulb: XENON
- Current: 0.06A
- Flash/Min: 92/MIN

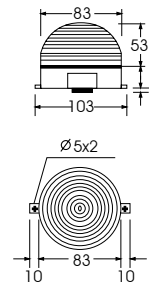


- **AL101**
MINI STROBE LIGHT
- Flash Rate: 12V 100/minute
24V 140/minute
Dome Color: Amber, Blue, Red
- Specifications**
- Item No. : AL101-12
 - Voltage: DC12V
 - Bulb: XENON
 - Current: 0.13A

- Item No. : AL101-24
- Voltage: DC24V
- Bulb: XENON
- Current: 0.09A



- **SL230**
STROBE LIGHT W/IP65 BOX
- Specifications**
- Voltage: AC 220V
 - Size: 100mm DIA x 110mm H
 - Current/Draw: 0.02A
 - Dome Material: Polycarbonate
 - Flash Pattern: Single
 - Bulb: Xenon U
 - Enclosure Rating: IP65




MAGNETIC ROTATING BEACONS




- **CG-30/CG-30M**
REVOLVING LIGHT
- Flash Rate: 90/minute
Dome Color: Amber, Blue, Red
- Specifications**
- Item No. : CG30-12
 - Voltage: DC12V
 - Bulb: 12V 10W
 - Current: 0.9A

- Item No. : CG30-24
- Voltage: DC24V
- Bulb: 24V 10W
- Current: 0.5A


- Item No. : CG30-110
- Voltage: AC 110V
- Bulb: 12V 8W
- Current: 0.1A

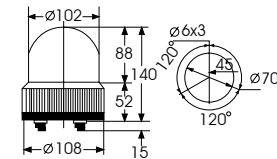

- **BFM-LED**
MAGNET LED REVOLVING LIGHT
- Flash Rate: 120/minute
Dome Color: Amber, Blue, Red, Green
- Specifications**
- Item No. BFM-LED
 - Voltage: 12/24VDC
 - Flash rate: 120/minute
 - Dome Color: Amber, Blue, Red, Green
 - Bulb: 3W LED
 - Current: 0.35A
 - Enclosure Rating: IP66

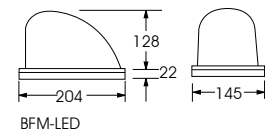


- **BFM45LED**
LED BEACON LIGHTS
- Specifications**
- Voltage: 12-24 V DC
 - Size: 202mm DIA x 145 mm H
 - LED type: 1W x 12 pcs
 - Current/Energy: 0.5A
 - Flash Pattern: 3
 - Dome Material: Polycarbonate
 - Base: ABS
 - Colors: Amber, Blue, Red, Green
 - Mounting: Magnet mounting
 - Enclose Rating: IP65
 - Certificate: CE, ECE R10

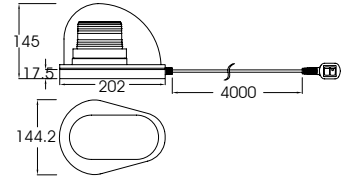

- **BFM12M**
MAGNETIC REVOLVING LIGHT
- Flash Rate: 120/minute
Dome Color: Amber, Blue, Red
- Specifications**
- Item No. : BFM-12M
 - Voltage: DC 12V
 - Bulb: 12V 35W
 - Current: 3A
 - Enclosure Rating: IP66

- Item No. : BFM-24M
- Voltage: DC 24V
- Bulb: 24V 60W
- Current: 2.5A

- Item No. : BFM-12H
- Voltage: DC 12V
- Bulb: 12V 35W
- Current: 4.5A

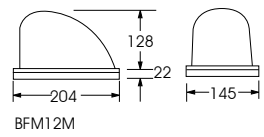

ROTATING BEACONS

ROTATING BEACONS



CML


CML
REVOLVING LIGHT

Flash Rate: 130/minute

Dome Color: Amber, Blue, Red, Green

Specifications

- Item No. : CML-12
- Voltage: DC 12V
- Bulb: 12V 10W
- Current: 0.9A
- Item No. : CML-24
- Voltage: DC 24V
- Bulb: 24V 21W
- Current: 0.5A
- Item No. : CML-110
- Voltage: AC 110V
- Bulb: 12V 8W
- Current: 0.08A
- Item No. : CML-220
- Voltage: AC 220V
- Bulb: 12V 8W
- Current: 0.04A

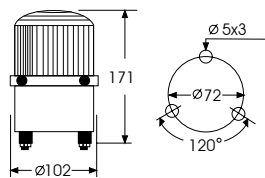

CA

CA-M


CA / CA-M
REVOLVING LIGHT /
MAGNETIC REVOLVING LIGHT

Flash Rate: 130/minute

Dome Color: Amber, Blue, Red, Green

Specifications

- Item No. : CA-12
- Voltage: DC 12V
- Bulb: 12V 10W
- Current: 1.75A
- Item No. : CA-24
- Voltage: DC 24V
- Bulb: 24V 21W
- Current: 0.9A
- Item No. : CA-12M
- Voltage: DC 12V
- Bulb: 12V 21W
- Current: 1.75A
- Item No. : CA-24M
- Voltage: DC 24V
- Bulb: 24V 21W
- Current: 0.9A
- Item No. : CA-110
- Voltage: AC 110V
- Bulb: 12V 10W
- Current: 0.1A
- Item No. : CA-220
- Voltage: AC 220V
- Bulb: 12V 10W
- Current: 0.05A



CG-100


CG-100
REVOLVING LIGHT

Flash Rate: 120/minute

Dome Color: Amber, Blue, Red

Specifications

- Item No. : CG-100-12
- Voltage: DC 12V
- Bulb: 12V 35W
- Current: 3.1A
- Item No. : CG-100-24
- Voltage: DC 24V
- Bulb: 24V 60W
- Current: 2.5A
- Item No. : CG-100-110
- Voltage: AC 110V
- Bulb: 110V 40W
- Current: 0.38A
- Item No. : CG-100-220
- Voltage: AC 220V
- Bulb: 220V 40W
- Current: 0.19A



GB

GBX


GB/GBX
REVOLVING LIGHT

Flash Rate: 130/minute

Dome Color: Amber, Blue, Red, Green

Specifications

- Item No. : GB-12
- Voltage: DC 12V
- Bulb: 12V 35W
- Current: 3A
- Item No. : GB-24
- Voltage: DC 24V
- Bulb: 24V 60W
- Current: 2.5A
- Item No. : GB-110
- Voltage: AC 110V
- Bulb: 12V 35W
- Current: 0.35A
- Item No. : GB-220
- Voltage: AC 220V
- Bulb: 12V 35W
- Current: 0.17A
- Item No. : GB-12H
- Voltage: DC 12V
- Bulb: 12V 50W
- Current: 4.1A
- Item No. : GB-24H
- Voltage: DC 24V
- Bulb: 24V 50W
- Current: 2.1A
- Item No. : GB-110H
- Voltage: AC 110V
- Bulb: 12V 50W
- Current: 0.45A
- Item No. : GB-220H
- Voltage: AC 220V
- Bulb: 12V 50W
- Current: 0.22A



CHB


CHB
REVOLVING LIGHT

Flash Rate: 130/minute

Dome Color: Amber, Blue, Red

Specifications

- Item No. : CHB-12
- Voltage: DC 12V
- Bulb: 12V 35W
- Current: 3.1A
- Item No. : CHB-24
- Voltage: DC 24V
- Bulb: 24V 60W
- Current: 2.5A
- Item No. : CHB-110
- Voltage: AC 110V
- Bulb: 12V 35W
- Current: 0.35A
- Item No. : CHB-220
- Voltage: AC 220V
- Bulb: 12V 35W
- Current: 0.17A
- Item No. : CHB-12H
- Voltage: DC 12V
- Bulb: 12V 50W
- Current: 4.1A
- Item No. : CHB-24H
- Voltage: DC 24V
- Bulb: 24V 50W
- Current: 2.16A



CHS


CHS
REVOLVING LIGHT

Flash Rate: 130/minute

Dome Color: Amber, Blue, Red

Specifications

- Item No. : CHS-12
- Voltage: DC 12V
- Bulb: 12V 35W
- Current: 3.1A
- Item No. : CHS-24
- Voltage: DC 24V
- Bulb: 24V 60W
- Current: 2.5A
- Item No. : CHS-110
- Voltage: AC 110V
- Bulb: 12V 35W
- Current: 0.35A
- Item No. : CHS-220
- Voltage: AC 220V
- Bulb: 12V 35W
- Current: 0.17A
- Item No. : CHS-12H
- Voltage: DC 12V
- Bulb: 12V 50W
- Current: 4.1A
- Item No. : CHS-24H
- Voltage: DC 24V
- Bulb: 24V 50W
- Current: 2.1A



CG560


CG560
REVOLVING LIGHT

Flash Rate: 120/minute

Dome Color: Amber, Blue, Red

Specifications

- Item No. : CG560-12
- Voltage: DC 12V
- Bulb: H1 12V 55W
- Current: 4.7A
- Item No. : CG560-24
- Voltage: DC 24V
- Bulb: H1 24V 70W
- Current: 3A
- Certificate: CE, SAE J845 Class 1



CG550


CG550
REVOLVING LIGHT

Flash Rate: 70/minute

Dome Color: Amber, Blue, Red

Specifications

- Item No. : CG550-12
- Voltage: DC 12V
- Bulb: H3 12V 35W x 2
- Current: 5.8A
- Item No. : CG560-24
- Voltage: DC 24V
- Bulb: H3 24V 55W x 2
- Current: 4.5A



ROTATING BEACONS




AU1

REVOLVING LIGHT

Flash Rate: 130/minute
Dome Color: Amber, Blue, Red

Specifications

- Item No. : AU1-12
- Voltage: DC 12V
- Bulb: 12V 10W
- Current: 0.9A
- Item No. : AU1-24
- Voltage: DC 24V
- Bulb: 24V 10W
- Current: 0.5A
- Item No. : AU1-110
- Voltage: AC 110V
- Bulb: 12V 8W
- Current: 0.08A
- Item No. : AU1-220
- Voltage: AC 220V
- Bulb: 12V 8W
- Current: 0.04A




AU2

REVOLVING LIGHT

Flash Rate: 130/minute
Dome Color: Amber, Blue, Red

Specifications

- Item No. : AU2-12
- Voltage: DC 12V
- Bulb: 12V 21W
- Current: 1.75A
- Item No. : AU2-24
- Voltage: DC 24V
- Bulb: 24V 21W
- Current: 0.9A
- Item No. : AU2-110
- Voltage: AC 110V
- Bulb: 12V 10W
- Current: 0.1A
- Item No. : AU2-220
- Voltage: AC 220V
- Bulb: 12V 10W
- Current: 0.05A




AU3

REVOLVING LIGHT

Flash Rate: 130/minute
Dome Color: Amber, Blue, Red

Specifications

- Item No. : AU3-12
- Voltage: DC 12V
- Bulb: 12V 35W
- Current: 3A
- Item No. : AU3-24
- Voltage: DC 24V
- Bulb: 24V 60W
- Current: 2.5A
- Item No. : AU3-110
- Voltage: AC 110V
- Bulb: 12V 35W/110V40W
- Current: 0.4A
- Item No. : AU3-220
- Voltage: AC 220V
- Bulb: 12V 35W/220V 40W
- Current: 0.2A




AU4

REVOLVING LIGHT

Flash Rate: 70/minute
Dome Color: Amber, Blue, Red

Specifications

- Item No. : AU4-12
- Voltage: DC 12V
- Bulb: 12V 35W
- Current: 3A
- Item No. : AU4-24
- Voltage: DC 24V
- Bulb: 24V 60W
- Current: 2.5A
- Item No. : AU4-110
- Voltage: AC 110V
- Bulb: 12V 35W/110V 40W
- Current: 0.4A
- Item No. : AU4-220
- Voltage: AC 220V
- Bulb: 12V 35W/220V 40W
- Current: 0.2A



MAGNETIC BATTERY OPERATED LED WARNING LAMPS




SAR5

MAGNETIC LED STROBE/ROTATING LIGHT

Specifications

- Voltage: DC 6V
- Bulb: LED x 15pcs
- Battery: UM3 x 4pcs
- Size: Dome DIA. 86mm, Base DIA. 104mm, 99mmH
- Color: Red, Amber, Blue, Green, White




SAR6

MAGNETIC LED ROTATING LIGHT

Specifications

- Voltage: DC 6V
- Bulb: LED x 20pcs
- Battery: UM3 x 4pcs
- Color: Red, Amber, Blue, Green, White




CARL

LED ROTATING LIGHT

Specifications

- Voltage: DC 12/24V, AC 110V/220V
- Size: 122mm DIA x 182mm H
- LED Type: 5mm LED x 80pcs
- Current/Energy: DC 12V - 0.09A
DC 24V - 0.045A
AC 110V/220V - 0.04A
- Flash Rate: 120/minute
- Color: Red, Amber
- Enclosure: IP65




SIGNAL LIGHTS



CM-5LED LED FLASHING LIGHT

Specifications


- Voltage: AC 110V/220V
- Size: 102mm DIA x 171mm H
- LED Type: 5mm LED x 5pcs
- Current/Energy: 0.03A
- Flash Rate: 180/minute
- Color: Red, Amber
- Enclosure: IP65



CM-15LED LED ROTATING LIGHT

Specifications


- Voltage: AC 110V/220V
- Size: 102mm Dia. x 171mm H
- Bulb: LED x 15pcs
- Current/Energy: 0.03A
- Flash Rate: Single (60FPM)
- Color: Red, Amber
- Enclosure Rating: IP65



D800-LED LED FLASHING LIGHT

Specifications

- Voltage: DC 12/24V, AC 110V/220V
- Size: 103mm Dia. x 76mm H
- Bulb: White LED x 12pcs
- Current/Energy: DC 0.1A AC 0.03A
- Flash Rate: Single (60FPM)
- Color: Red, Amber, Blue, Green, White
- Enclosure Rating: IP65

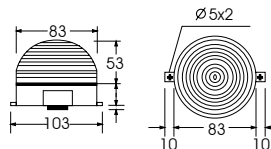

SIRENS



CP1 PIEZO SIREN

Specifications

- Size: 60mm L x 45mm W x 40mm H
- Voltage: DC 12V
- Tone: 1-TONE, BI-BI
- Output: 105DB
- Packing: 100pcs/0.6CFT



CP2 PIEZO SIREN

Specifications

- Size: 57mm DIA x 56mm L
- Voltage: DC 12V
- Tone: BI-BI
- Output: 108DB
- Packing: 100pcs/1.6CFT



CP23 PIEZO SIREN

Specifications

- Size: 57mm DIA x 54mm L
- Voltage: DC 12V
- Tone: 1-TONE
- Output: 108DB
- Packing: 100pcs/1.4CFT



886 PIEZO SIREN

Specifications

- Size: 46mm DIA x 50mm L
- Voltage: DC 12V-24V
- Tone: BI-BI
- Output: 85 +/- 10DB
- Packing: 200pcs/2.4CFT




BACKUP ALARMS SAE E-MARK



668 BACKUP ALARM

Specifications

- Voltage: DC 12V-24V, 12V-48V, 12V-80V
- Sound Level: 87DB, 97DB, 102DB
- Size: 104mm L x 42mm W x 76mm H
- Certificate: CE, SAE J994
- Enclosure Rating: IP67



698 BACKUP ALARM

Specifications

- Voltage: DC 12V-24V, 12V-48V, 12V-80V
- Sound Level: 87DB, 97DB, 102DB
- Size: 102mm L x 41mm W x 62mm H
- Enclosure Rating: IP67



608 BACKUP ALARM

Specifications

- Voltage: DC 12V-24V, 12V-48V
- Sound Level: 107DB
- Size: 132mm L x 73mm W x 82mm H
- Enclosure Rating: IP67



8668 BACKUP ALARM

Specifications

- Voltage: DC 12V-24V, 12V-48V
- Sound Level: 112DB
- Size: 127.64mm L x 96mm W x 78mm H
- Certificate: CE, SAE J994
- Enclosure Rating: IP67



SIRENS



CH44 ELECTRONIC SIREN

Specifications

- Size: 102mm DIA x 110mm L
- Voltage: DC 12V, 24V
- Tone: 1-TONE
- Output: 15W
- Packing: 40pcs



PW235 ELECTRONIC SIREN

Specifications

- Size: 135mm DIA x 155mm L
- Voltage: DC12V, AC110V, AC220V
- Tone: 1-TONE
- Output: 15W
- Packing: 24pcs/2.8CFT



768 BACKUP ALARM

Specifications

- Voltage: DC 12V/24V
- Tone: BI-BI
- Packing: 100pcs/2.6CFT



BACKUP ALARMS E-MARK



678 BACKUP ALARM

Specifications

- Voltage: DC 12V-24V, 12V-48V, 12V-80V
- Sound Level: 87DB, 97DB
- Size: 104mm L x 40mm W x 68mm H
- Enclosure Rating: IP67



628H BACKUP ALARM

Specifications

- Voltage: DC 12V-24V, 12V-48V, 12V-80V
- Sound Level: 87DB, 97DB, 102DB
- Size: 100mm L x 40mm W x 68mm H
- Enclosure Rating: IP67



688 BACKUP ALARM

Specifications

- Voltage: DC 12V-24V, 12V-48V
- Sound Level: 112DB
- Size: 127.64mm L x 96mm W x 78mm H
- Enclosure Rating: IP67



MOTOR SIRENS

MOTOR SIRENS & MEGAPHONES



MINI MS MINI MOTOR SIREN

Size: 75mm DIA x 82mm L

Specifications

- Item No. : MINI MS-24
- Voltage: DC 24V
- Current: 2A
- Power: 105db/M
- Item No. : MINI MS-110
- Voltage: AC 110V
- Current: 0.36A
- Power: 105db/M
- Item No. : MINI MS-220
- Voltage: AC 220V
- Current: 0.18A
- Power: 110db/M



S290 MOTOR SIREN

Size: 130mm DIA x 158mm L

Specifications

- Item No. : S290-12
- Voltage: DC 12V
- Current: 6A
- Power: 105db/M
- Item No. : S290-24
- Voltage: DC 24V
- Current: 3A
- Power: 105db/M
- Item No. : S290-110
- Voltage: AC 110V
- Current: 1A
- Power: 105db/M
- Item No. : S290-220
- Voltage: AC 220V
- Current: 0.5A
- Power: 110db/M



MS MOTOR SIREN

Size: 205mm L x 132mm W x 145mm H

Specifications


- Item No. : MS-12
- Voltage: DC 12V
- Current: 8.0A
- Power: 135db/M
- Item No. : MS-24
- Voltage: DC 24V
- Current: 6.0A
- Power: 135db/M
- Item No. : MS-110
- Voltage: AC 110V
- Current: 1.5A
- Power: 135db/M
- Item No. : MS-220
- Voltage: AC 220V
- Current: 0.8A
- Power: 135db/M



S283 DOUBLE SIREN

Specifications

- Item No. : S283-220
- Voltage: AC220V
- Rpm: 5500
- Current: 1A




BRITISH STYLE ALARM BELL

Specifications

- Item No. : 6"ALARMBELL
- Voltage available: DC6V, 12V, 24V
- Item No. : 8"ALARMBELL
- Voltage available: AC/DC12V, DC 24V, AC110V, 220V


- Item No. : 10"ALARMBELL
- Voltage available: AC110V, 220V



MG8 MEGAPHONE

Specifications








- Battery: UM-2 x 6pcs
- Output : 15W



MD10 MEGAPHONE

Specifications

- Battery: UM-2 x 6pcs
- Output : 15W

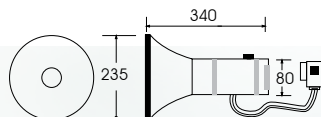

www.chingmars.com.tw

WARNING LAMPS AND LED STROBES

Ching Mars' dependable warning lamps feature SAE Class 1 power in compact size. Feature multiple pattern selection and a variety of colours. Compact size allows ease of mounting. Ching Mars' spot lamps come in rechargeable, hand held and magnet mounted designs. Keep them handy for emergency use.

OBSTRUCTION LIGHTS




CT15-LED

CT15-LED LED OBSTRUCTION LIGHT

Specifications

- Voltage: AC 110V/220V
- Bulb: 1W LED X 12PCS.
- Current/Energy: 0.1A
- Flash Rate: Steady Light
- Mounting: NPT 3/4
- Enclosure Rating: IP65

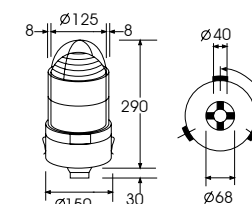


CT15

CT15 OBSTRUCTION LIGHT

Specifications

- Voltage: AC 110V/220V
- Flash Rate: Steady Light
- Mounting: NPT 3/4

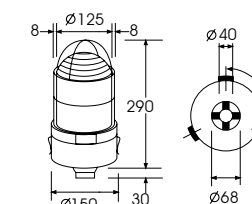

LED MODULE SAE J595



LPF4

- 18 User Selectable Patterns
- Multi Voltage 12-24VDC
- Low amp draw: 0.4amps at 12VDC
- Water resistant to SAE J845
- Flush Mount
- Chrome plated Aluminum housing
- Multi-unit Synchronization
- Pattern Re-set is available
- Colors: Amber/Red/Blue/Green/Clear
- Size: 4.70" L. x 1.34" W. x 1.10" H.

Benefits

- LPF4 4-LED warning lamp can be surface mounted anywhere on your vehicle.
- Suits all kind of vehicles and enhances their safety.
- The lamps are designed to have the equivalent peak luminous intensity in each split or all flash patterns.
- Long maintenance free service life and low amp draw, making this warning lamp a cost effective choice for multiple applications.
- SAE Class 1 certified lamp, providing excellent light output in all situations.







慶格實業有限公司

238新北市樹林區大安路502號10樓
Tel: 886-2-86873877 26871660
Fax: 886-2-86873833

SAE    ISO 9001

Ching Mars Corporation.

10F, No. 502, Da-An Road, Shu-Lin Dist. 238, New Taipei City, Taiwan
Tel : 886-2-86873877 26871660
Fax : 886-2-86873833
E-mail : sales@chingmars.com.tw
Http : //www.chingmars.com.tw

